


MDrive[®] Plus MDM•34

NEMA 34 Step & Direction integrated
1.8° 2-phase stepper motor & control
electronics

CE  REACH IP20

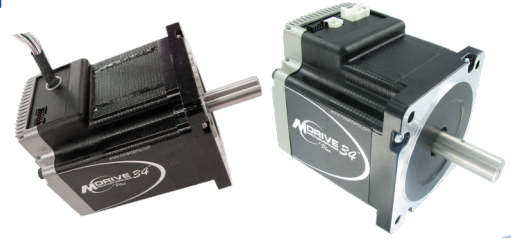

PRODUCT OVERVIEW

The MDrive Plus with step & direction input is a 1.8° 2-phase stepper motor with on-board control electronics. Step/direction signals of a master controller, e.g. a motion controller, or A/B signals of an encoder are converted directly into motion.

Settings for MDrive Plus step & direction input products may be changed on-the-fly or downloaded and stored in nonvolatile memory using the SPI Motor Interface software provided. This eliminates the need for external switches or resistors. Parameters are changed via an SPI port.

The MDrive Plus with step & direction input is ideal for machine builders who want an optimized motor with on-board electronics. The integrated electronics of these products reduces the potential for problems due to electrical noise by eliminating the cable between motor and drive.

Fewer individual system components also eliminates multiple potential failure points.

Compact, powerful and cost effective, these motion control solutions deliver exceptional smoothness and performance that can reduce system cost, design and assembly time for a large range of 2-phase stepper motor applications.

FEATURES AND BENEFITS

- Cost effective & compact integrated microstepping drive and NEMA 34 1.8° 2-phase stepper motor
- Advanced current control with automatic current reduction for exceptional performance and smoothness
- Single supply: +12 to +75 VDC
- 20 microstep resolutions up to 51,200 steps per rev, including: Degrees, Metric, & Arc Minutes
- Optically isolated Universal inputs accept +5 to +24 VDC signals, sourcing or sinking
- IP20 protection rating
- Thermal temp and over voltage/current warning
- Configurable options include:
 - Motor run/hold current
 - Motor direction via direction input
 - Microstep resolution
 - Clock type (step & direction, quadrature, step up/down)
 - Programmable digital filtering for clock and direction inputs
- Available options include:
 - Encoder
 - Multiple motor stack lengths
 - Connector options
 - Rear control knob for manual positioning
- Single, double, & triple motor stack lengths available
- Setup parameters may be switched on-the-fly
- Graphical user interface provided for quick and easy parameter setup



Additional setup, quick reference information, and supporting documents are available for download from the Novanta IMS download website
<https://novantaims.com/dloads/>

Three-dimensional depictions of this product are available for download from
<https://novantaims.com/dloads/3d-product-models/>




To select from the available features and build the LMD integrated stepper motor to fit your needs, use the Novanta IMS part number builder, available online at <https://novantaims.com/resources/part-number-builders/>

MDrive Plus MDM•34 Step & Direction

Motor Performance

		MDrive 34		
Motor	Stack length	Single	Double	Triple
Holding torque	oz-in	408	574	1090
	N-cm	288	405	770
Detent torque	oz-in	10.9	14.16	19.83
	N-cm	7.7	10.0	14.0
Rotor inertia	oz-in-sec ²	0.01275	0.01924	0.03849
	kg-cm ²	0.90	1.35	2.70
Weight (motor+driver)	oz	4.1	5.5	8.8
	g	1.9	2.5	4.0

Motor Speed Torque

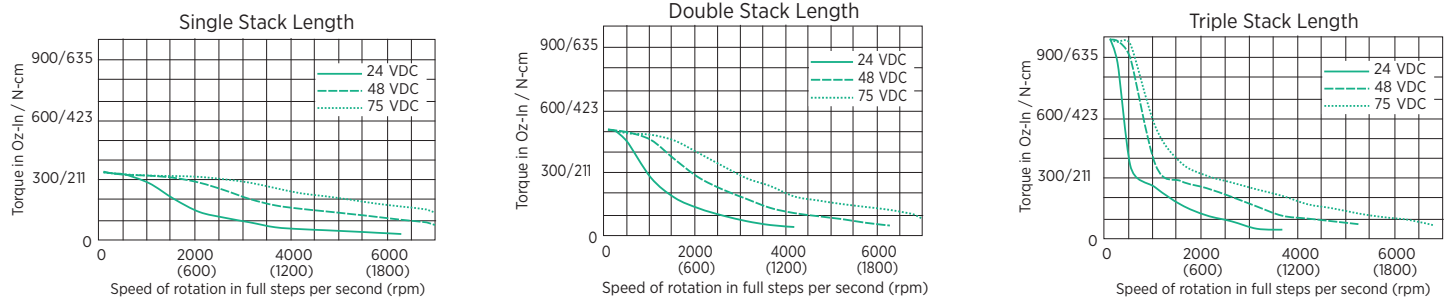

Test conditions: 100% current with damper simulating load.

Accessories

Description	Length feet (m)	Part Number
Communication Converters		
Electrically isolated, in-line converter pre-wired with mating connector to conveniently set/program communication parameters for a single MDrivePlus via a PC's USB port.		
Mates to 10-pin non-locking IDC connector	12.0 (3.6)	MD-CC300-001
Mates to 12-pin locking wire crimp connector	12.0 (3.6)	MD-CC303-001
Prototype Development Cables		
Speed test/development with pre-wired mating connector with other cable end open.		
Mates to 12-pin locking wire crimp connector for I/O, communication & power	10.0 (3.0)	PD12B-1434-FL3
Mates to 2-pin locking wire crimp connector for power	10.0 (3.0)	PDO2-3400-FL3
Encoder Cables		
Pre-wired mating connector with other cable end open.		
Mates to 10-pin friction lock wire crimp connector for optional internal differential optical encoder	6.0 (1.8)	PD10-3400-FL3
Mating Connector Kit		
Connectors for the assembly of cables. (Cable material not included). Sold in lots of 5. Manufacturer's crimp tool recommended for crimp connectors		
10-pin non-locking IDC connector for communication	—	CK-01
10-pin friction lock wire crimp connector for optional internal differential optical encoder	—	CK-02
12-pin locking wire crimp connector for I/O, communication, and power	—	CK-03
2-pin locking wire crimp connector for power	—	CK-05
Drive Protection Module		
Limits surge current and voltage to a safe level when DC input power to the MDrive Plus is switched on and off		
For all MDrive 34 step & direction input products	—	DPM75
Quick Start Kit		
For rapid design verification, all-inclusive QuickStart Kits includes prototype development cables and communication converter for MDrivePlus initial functional setup and system testing.		
For all MDrive 34 step & direction input products, add a "K" to the beginning of the part number when ordering		